




# GIUNO ULTRA BT A50

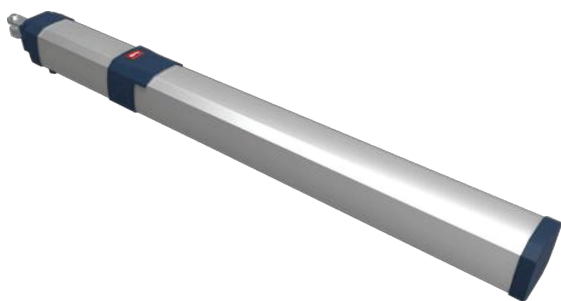

## GIUNO ULTRA BT A50

Code	Name	Description
P935106 00001	Giuno Ultra BT A50	24V hydraulic operator for swinging gates up to 17ft. in length and 1,760lbs. Cycle time 20sec, magnetic limit switches, very intensive use and easy to set up.
P935105 00001	Giuno Ultra BT A20	24V hydraulic operator for swinging gates up to 10ft. in length and 550lbs. Cycle time 20sec, magnetic limit switches, very intensive use and easy to set up.

## DIMENSIONS

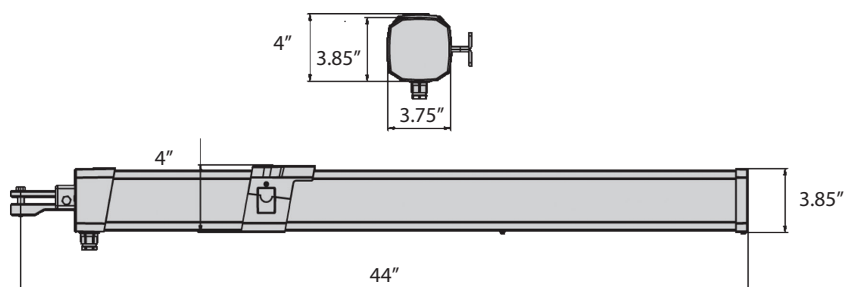

	Giuno Ultra BT A50
Control unit	Thalia P
Operator type	Hydraulic for swinging gate
Power supply	24 V
Power input	300 W
Useful rod stroke	15.35"
Maximum angle	110°
Cycle time	20 sec
Type of limit switching	Magnetic
Hydraulic Locking	Yes
Release	Triangular Key
Frequency of use	Very Intensive
Environmental conditions	From -4F to 140F
Protecting rating	IP 55



Be ahead

BFT Americas, Inc  
1200 SW 35th Ave, Suite B  
Boynton Beach, FL 33426

T: +1 561 995 8155  
T: US. 1877 995 8155  
info.bft@bft-usa.com  
www.bftaccess.com  
www.bft-usa.com

**THALIA P D113747 00001- Thalia P 120V**

Control panel for one or two Giuno BT swing gate operators.

Board power supply 120V single phase.

Operators power supply 24Vdc 300W max each operator.

The main features are: removable terminal blocks with new standard color-coding, simplified scenario-based programming with display and incorporated dual channel receiver, outputs for light and lock, D-Track anti crushing system, U-Link interconnectivity protocol, slowdown during opening, closing and electronic self-learning.

The main functions are: automatic time to close, fast closing, partial opening and deadman feature.

**KETHALIA12E-Thalia P / Control Board 12" x 14"**

Thalia Universal Control Board with built in receiver

12" x 14" Lockable Fiberglass Enclosure Box










2- 9amp hour batteries

Steel Back Panel

120V outlet

Test Button

**ACCESSORIES**

	<b>Code</b>	<b>Name</b>	<b>Description</b>
	D111904	<b>MITTO B RCB02 R1</b>	Transmitter with 2 channels. Range 50/100m and power supply 12V with one battery type 23 A.
	P121023	<b>Q.BO KEY WM AV</b>	Vandal proof key selector with double contact for outdoor use. Metal structure.
	P121024	<b>Q.BO TOUCH</b>	Wireless digital touch button panel 433Mhz rolling code.
	WIFI-BFT-KPAD II	<b>WIFI VIDEO II</b>	WiFi video and audio app based system with 1,000 memory keypad.
	P111748 00002	<b>KCAB1604DB</b>	Cable for Giuno Ultra BT. Required for all installations. Sold per ft.
	P125020	<b>BBT BAT</b>	Set of backup batteries
	BFTCELL-PRIME	<b>CELL PRIME 4G</b>	4G Cellular access control system with a 7-time time clock. 1,000 memory App., programable keypad.
	P111043 0000	<b>PHOTOCELLS</b>	FL130B Set of photocells.
	KIRPOLA-PHOT001-UL	<b>POLARIZED PHOTOCELLS</b>	Polarized photocells with reflector.



Be ahead

BFT Americas, Inc  
1200 SW 35th Ave, Suite B  
Boynton Beach, FL 33426

T: +1 561 995 8155  
T: US. 1877 995 8155  
info.bft@bft-usa.com  
www.bftaccess.com  
www.bft-usa.com